



IF WE WON'T USE IT
WE WON'T SELL IT

SOLAR PUMPS & SUPPLIES

EDGE RURAL SUPPLIES SOLAR CATALOGUE

Includes

IN OUR CATALOGUE

DC SOLAR PUMPS

WE ALSO SUPPLY

STAINLESS STEEL WIRE ROPE
PUMP CABLE 3 & 4 CORE
SOLAR PRESSURE SWITCHES


LONG THIMBLES
PRESSURE GUAGES
D SHACKLES

INFO@EDGERURALSUPPLIES.COM.AU · PH: 0408 738 586
EDGERURALSUPPLIES.COM.AU


PANDURRA STATION
PRIVATE BAG 15 · PORT AUGUSTA SA 5701

DC SOLAR PUMP

3 INCHES SCREW PUMP

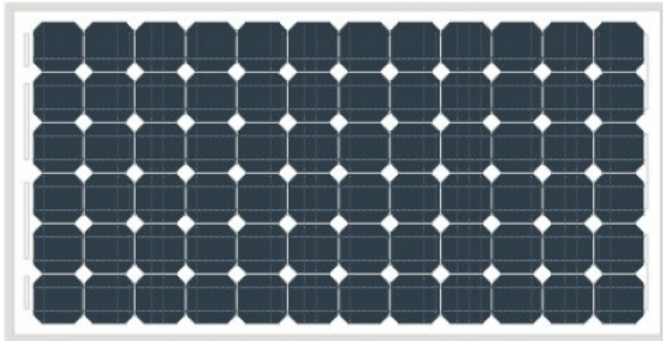

Outside switch

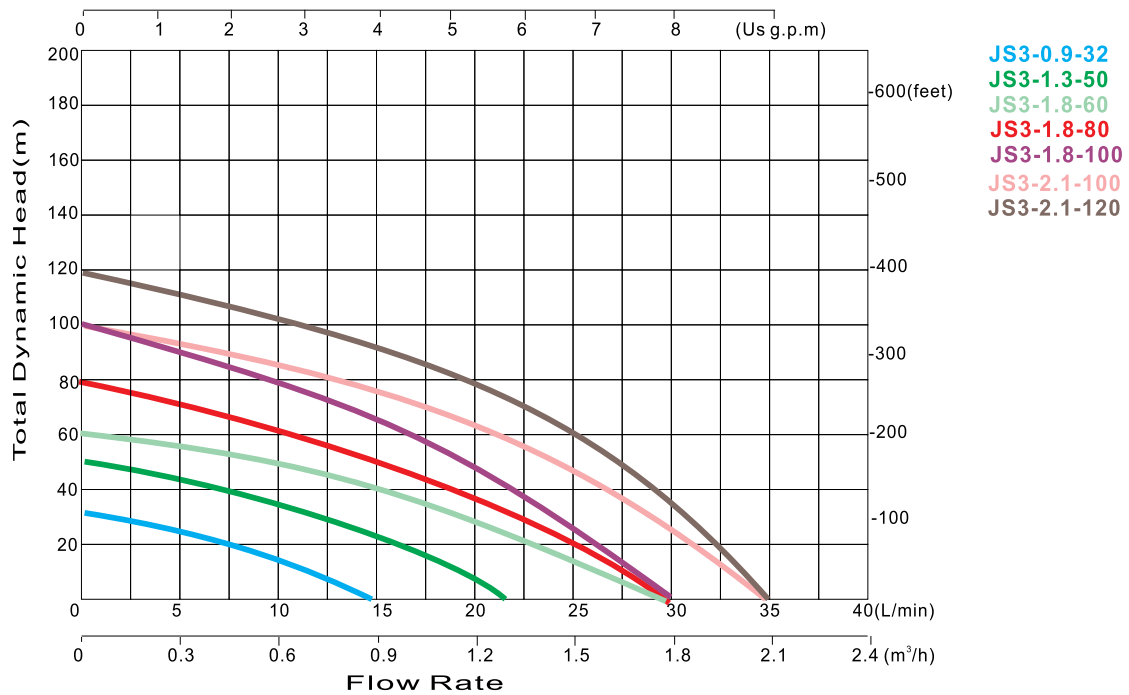

ACCESSORIES

1. Pump Controller
2. Screw
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS

Outlet: stainless steel
 Pump body: stainless steel
 Motor Body: stainless steel
 Screw: stainless steel
 Bearing: NSK

PUMP PERFORMANCE



TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JS3-0.9-32	24	100	0.9	32	0.75"	76
JS3-1.3-50	24	120	1.3	50	0.75"	76
JS3-1.8-60	24	180	1.8	60	0.75"	76
JS3-1.8-80	24	210	1.8	80	0.75"	76
JS3-1.8-100	24	270	1.8	100	0.75"	76
JS3-2.1-100	48	450	2.1	100	0.75"	76
JS3-2.1-120	48	540	2.1	120	0.75"	76

DC SOLAR PUMP

4 INCHES SCREW PUMP



Outside switch

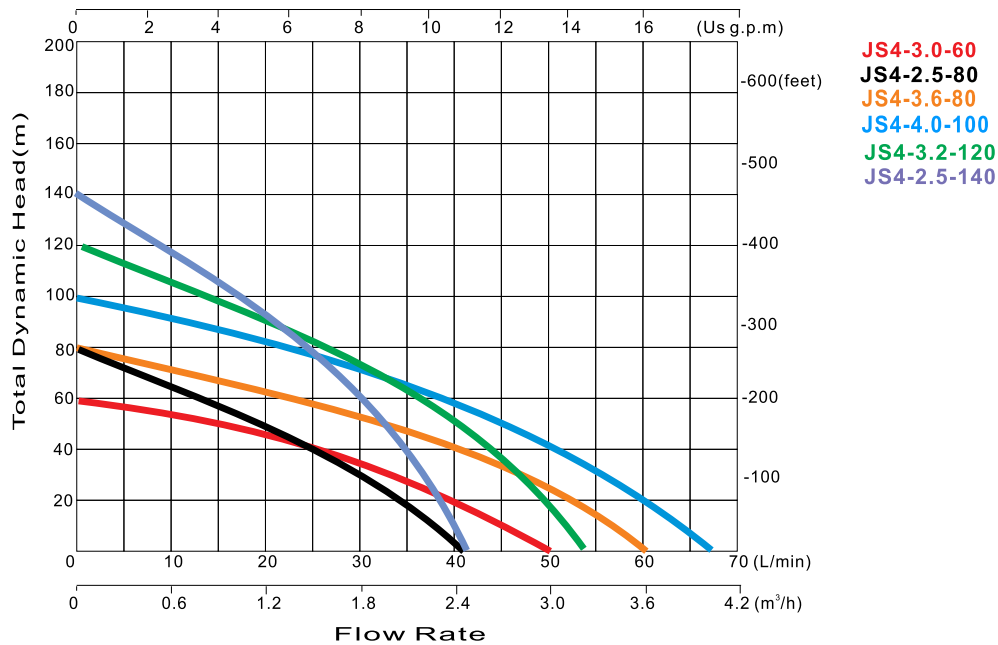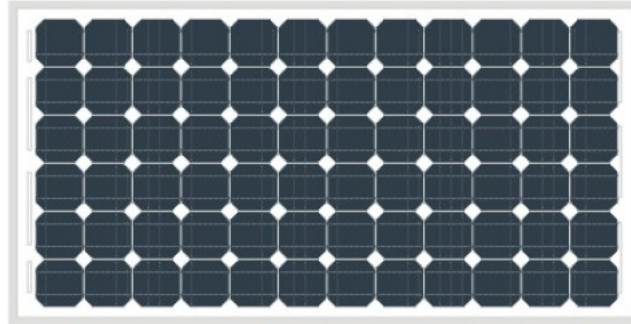

ACCESSORIES

1. Pump Controller
2. Screw
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS


Outlet: stainless steel
 Pump body: stainless steel
 Motor Body: stainless steel
 Screw: stainless steel
 Bearing: NSK

PUMP PERFORMANCE


TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JS4-3.0-60	36	450	3.0	60	1"	100
JS4-2.5-70	48	500	2.5	70	1"	100
JS4-3.6-80	48	750	3.6	80	1"	100
JS4-4.0-100	72	1000	4.0	100	1"	100
JS4-3.2-120	72	1000	3.2	120	1"	100
JS4-2.5-140	72	1000	2.5	140	1"	100

DC SOLAR PUMP

4 INCHES CENTRIFUGAL PUMP

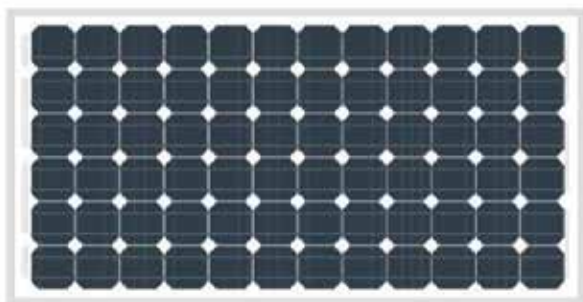

Outside switch

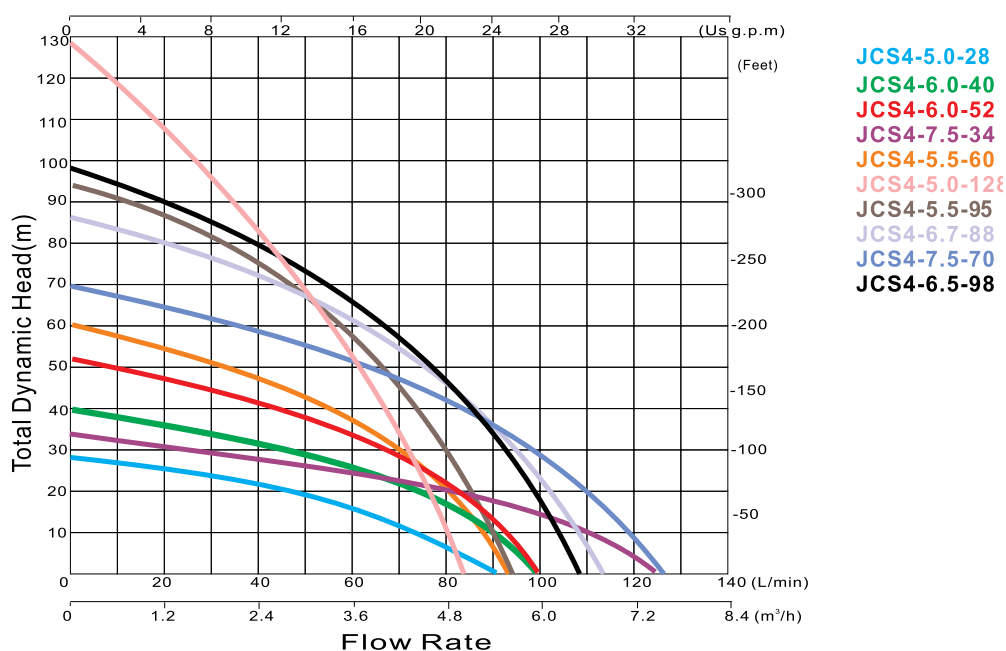

- JCS4-5.0-28
- JCS4-6.0-40
- JCS4-6.0-52
- JCS4-7.5-34
- JCS4-5.5-60
- JCS4-5.0-128
- JCS4-5.5-95
- JCS4-6.7-88
- JCS4-7.5-70
- JCS4-6.5-98

ACCESSORIES

1. Pump Controller
2. Impeller
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS



- Outlet: stainless steel
- Pump body: stainless steel
- Motor Body: stainless steel
- Impeller: stainless steel
- Bearing: NSK

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JCS4-5.0-28	24	250	5.0	28	1.25"	100
JCS4-6.0-40	48	500	6.0	40	1.25"	100
JCS4-6.0-52	48	600	6.0	52	1.25"	100
JCS4-7.5-34	48	750	7.5	34	1.25"	100
JCS4-5.5-60	48	750	5.5	60	1.25"	100
JCS4-5.0-128	72	1200	5.0	128	1.25"	100
JCS4-5.5-95	72	1000	5.5	95	1.25"	100
JCS4-6.7-88	72	1000	6.7	88	1.25"	100
JCS4-7.5-70	72	1000	7.5	70	1.25"	100
JCS4-6.5-98	72	1200	6.5	98	1.25"	100

DC SOLAR PUMP

4 INCHES CENTRIFUGAL PUMP

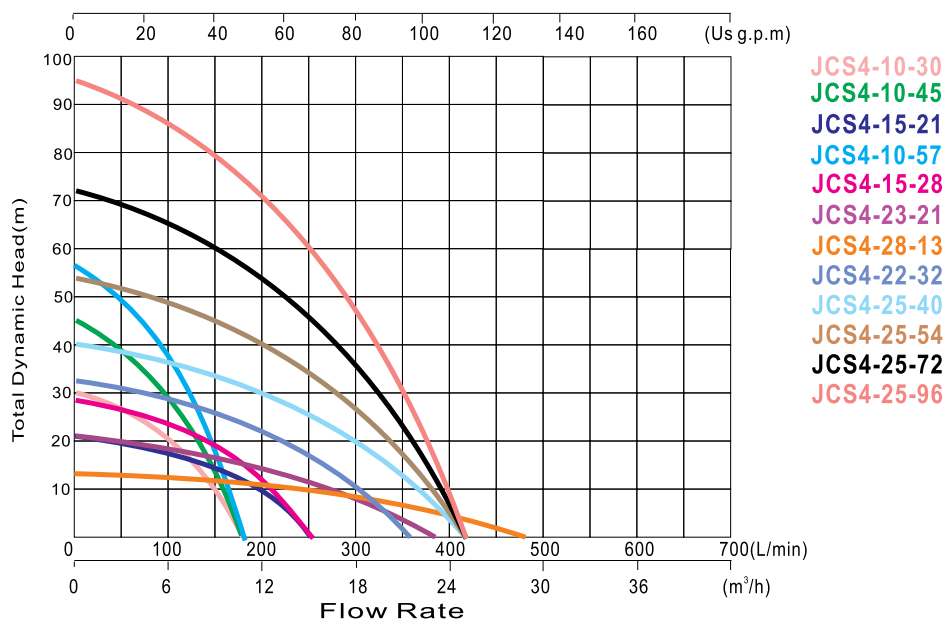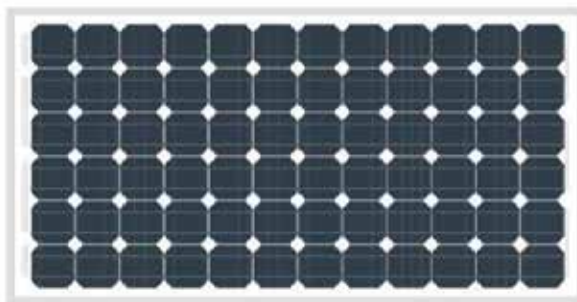

ACCESSORIES

1. Pump Controller
2. Impeller
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS

Outlet: stainless steel
 Pump body: stainless steel
 Motor Body: stainless steel
 Impeller: stainless steel
 Bearing: NSK

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JCS4-10-30	48	750	10.0	30	1.5"	100
JCS4-10-45	72	1000	10.0	45	1.5"	100
JCS4-15-21	72	1000	15.0	21	2"	100
JCS4-10-57	72	1200	10.0	57	1.5"	100
JCS4-15-28	72	1200	15.0	28	2"	100
JCS4-23-21	72	1200	23.0	21	2"	100
JCS4-22-32	220	1500	22.0	32	2"	100
JCS4-25-40	220	1800	25.0	40	2"	100
JCS4-25-54	288	2200	25.0	54	2"	100
JCS4-25-72	288	3000	25.0	72	2"	100
JCS4-25-96	288	4000	25.0	96	2"	100

DC SOLAR PUMP



JP6-9/250




JP13-13/370
JP17-15/500
JP21-19/900




JP31-19/1200



Outside switch

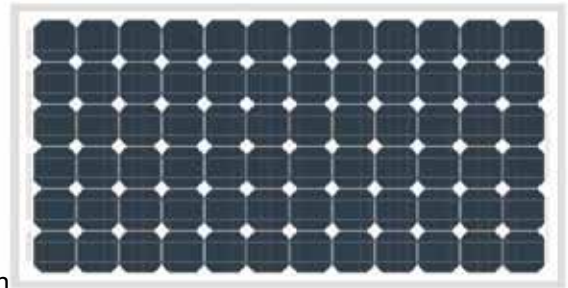

JP60-13/2200

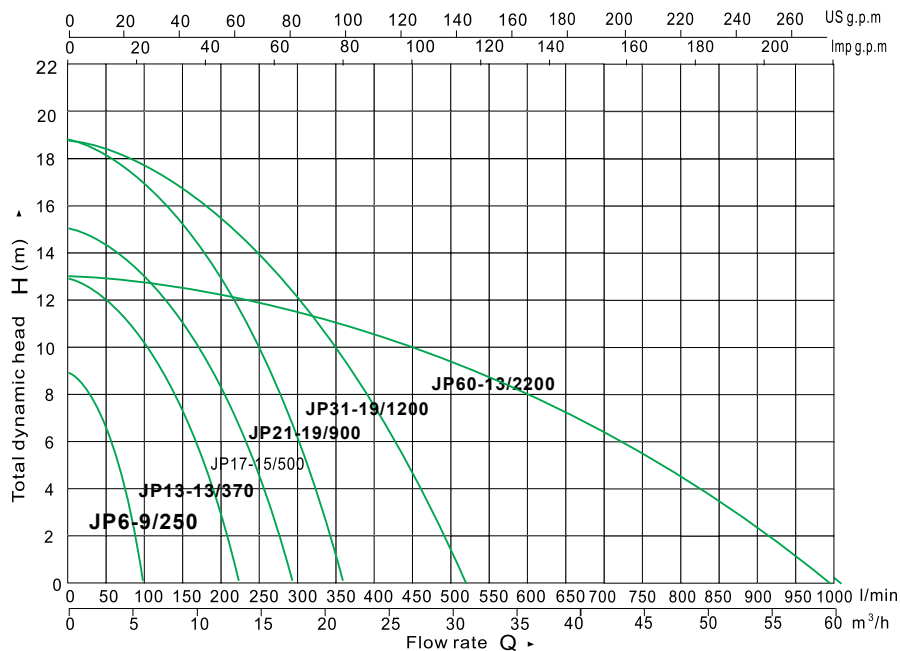

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m ³ /h)	MAX HEAD (m)	INLET/OUTLET (inch)
JP6-9/250	24	250	6	9	1.5
JP13-13/370	48	370	13	13	2
JP17-15/500	48	500	17	15	2
JP21-19/900	72	900	21	19	2
JP31-19/1200	72	1200	31	19	2.5
JP60-13/2200	220/380	2200	60	13	3

DC SOLAR PUMP



JQB



JETS




JCPS



JCM



JSDP

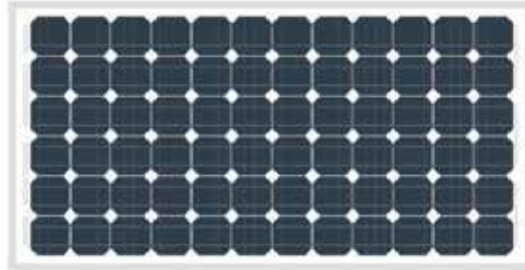


ACCESSORIES

1. Pump Controller
2. Impeller
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector



Outside switch

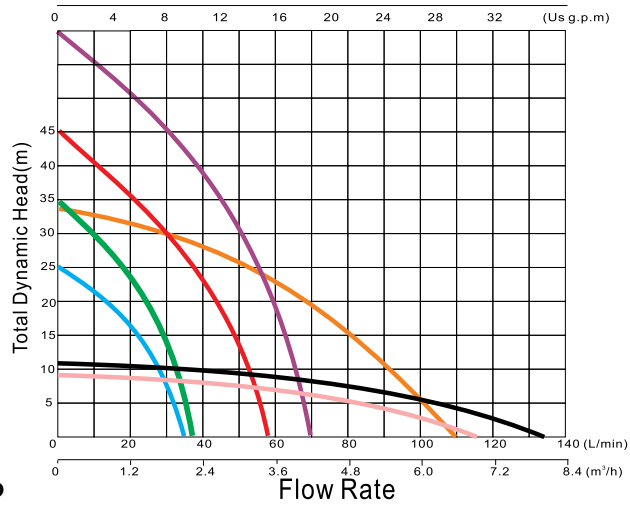


PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	SUCT. HEAD (m)	INLET/OUTLET (inch)
JQB-2.0-25	24	120	2.0	25	3	1" x 1"
JQB-2.2-35	36	210	2.2	35	3	1" x 1"
JETS-3.5-45	48	450	3.5	45	3	1" x 1"
JETS-4.2-60	72	750	4.2	60	3	1" x 1"
JCPS-6.6-34	72	750	6.6	34	3	1" x 1"
JPDP-7.0-9	48	400	7.0	9	/	1" x 1"
JSDP-8.0-11	48	500	8.0	11	/	1.5"
JCM-5.0-55	48	500	5.0	55	/	1.5"
JCM-5.0-80	48	750	5.0	80	/	1" x 1"

DC SOLAR PUMP

3 INCHES CENTRIFUGAL PUMP

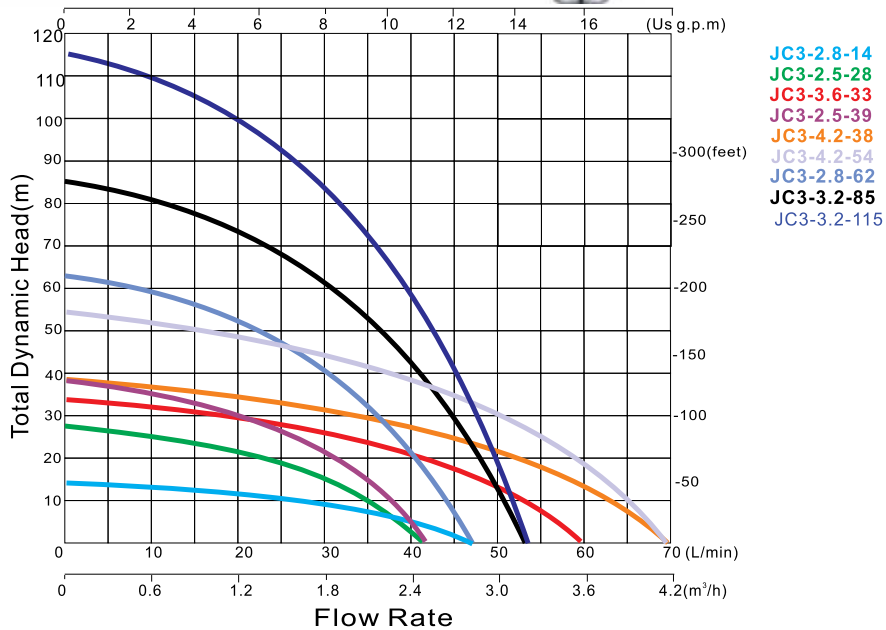

ACCESSORIES

1. Pump Controller
2. Impeller
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS


Outlet: stainless steel
 Pump body: stainless steel
 Motor Body: stainless steel
 Impeller: Plastic.PPO
 Bearing: NSK

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JC3-2.8-14	24	140	2.8	14	1"	76
JC3-2.5-28	36	260	2.5	28	1"	76
JC3-3.6-33	36	320	3.6	33	1"	76
JC3-2.5-39	36	400	2.5	39	1"	76
JC3-4.2-38	36	440	4.2	38	1"	76
JC3-4.2-54	48	600	4.2	54	1"	76
JC3-2.8-62	48	600	2.8	62	1"	76
JC3-3.2-85	48	750	3.02	85	1"	76
JC3-3.2-115	72	1000	3.2	115	1"	76

DC SOLAR PUMP

4 INCHES CENTRIFUGAL PUMP

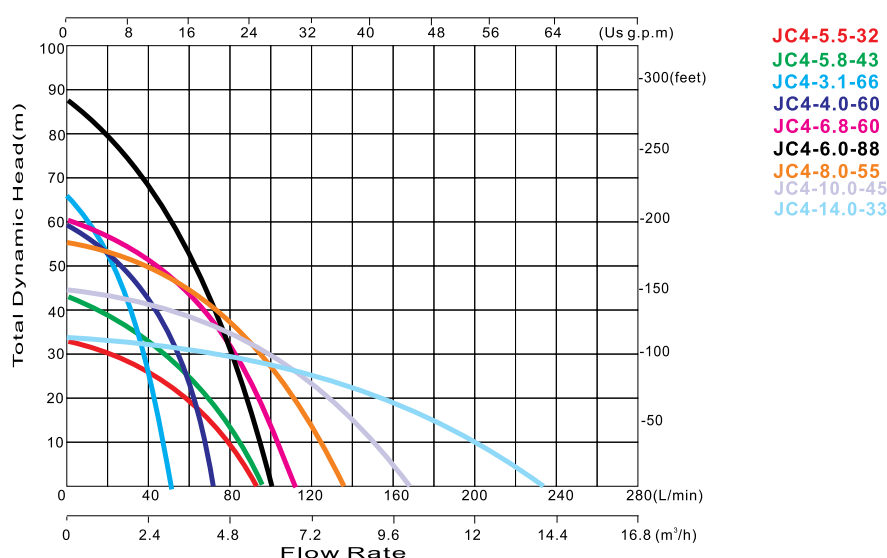

ACCESSORIES

1. Pump Controller
2. Impeller
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS

Outlet: stainless steel
 Pump body: stainless steel
 Motor Body: stainless steel
 Impeller: Plastic.PPO
 Bearing: NSK

PUMP PERFORMANCE


TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JC4-5.5-32	36	360	5.5	32	1.25"	100
JC4-5.8-43	36	500	5.8	43	1.25"	100
JC4-3.1-66	36	500	3.1	66	1.25"	100
JC4-4.0-60	48	720	4.0	60	1.25"	100
JC4-6.8-60	72	1000	6.8	60	1.25"	100
JC4-6.0-88	72	1000	6.0	88	1.25"	100
JC4-8.0-55	72	1000	8.0	55	1.5"	100
JC4-10.0-45	72	1000	10.0	45	2"	100
JC4-14.0-33	72	1000	14.0	33	2"	100

DC SOLAR PUMP

6 INCHES CENTRIFUGAL PUMP



Outside switch

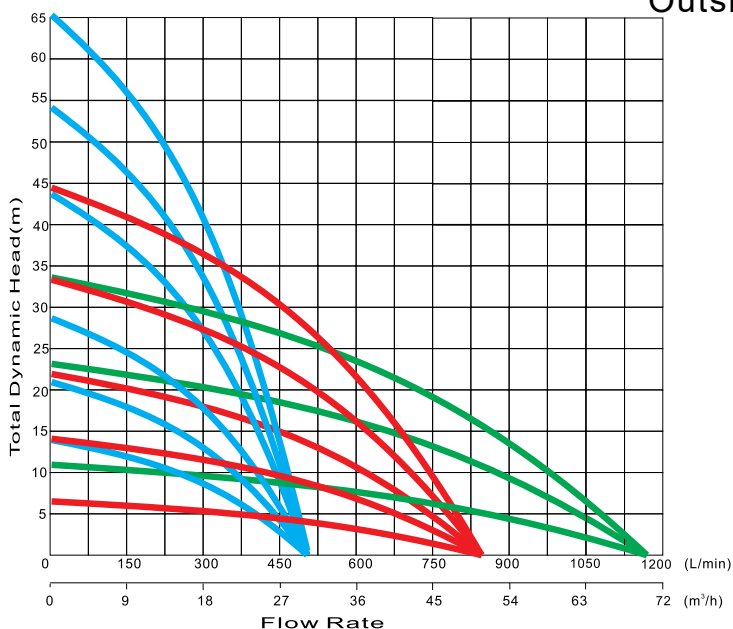

ACCESSORIES

1. Pump Controller
2. Impeller
3. Water Level Sensor
4. Cable for Solar Panel: 6m
5. Cable Connector

MATERIAL OF PARTS





Outlet: stainless steel
 Pump body: stainless steel
 Motor Body: stainless steel
 Impeller: stainless steel
 Bearing: NSK

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m3/h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JCS6-30-14	72V	1200	30	13	3	150
JCS6-30-21	216V	1500	30	21	3	150
JCS6-30-28	216V	1800	30	28	3	150
JCS6-30-43	288V	2200	30	43	3	150
JCS6-30-54	288V	3000	30	54	3	150
JCS6-30-65	288V	4000	30	65	3	150
JCS6-50-7	72V	1200	50	7	3 OR 4	150
JCS6-50-14	216V	1800	50	14	3 OR 4	150
JCS6-50-22	288V	2200	50	22	3 OR 4	150
JCS6-50-33	288V	3000	50	33	3 OR 4	150
JCS6-50-45	288V	4000	50	45	3 OR 4	150
JCS6-70-11	288V	2200	70	11	3 OR 4	150
JCS6-70-23	288V	3000	70	23	3 OR 4	150
JCS6-70-33	288V	4000	70	33	3 OR 4	150

DC SOLAR PUMP

6 INCHES CENTRIFUGAL PUMP

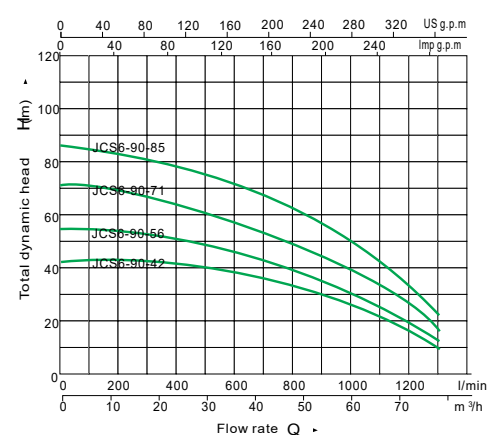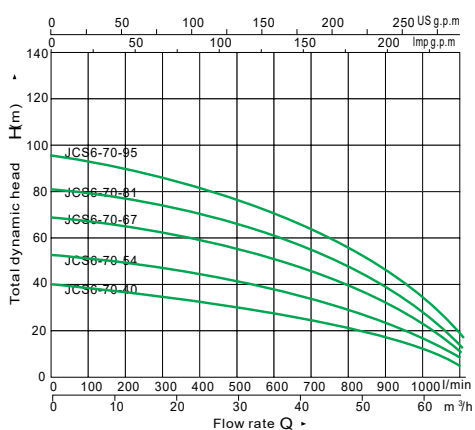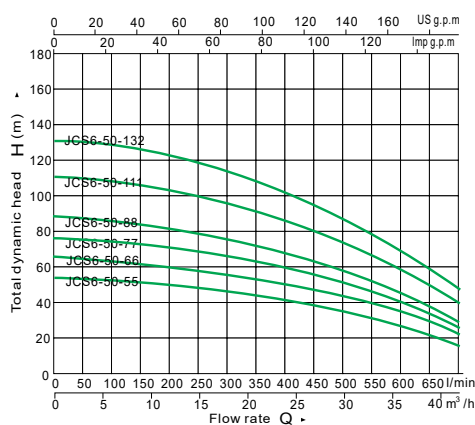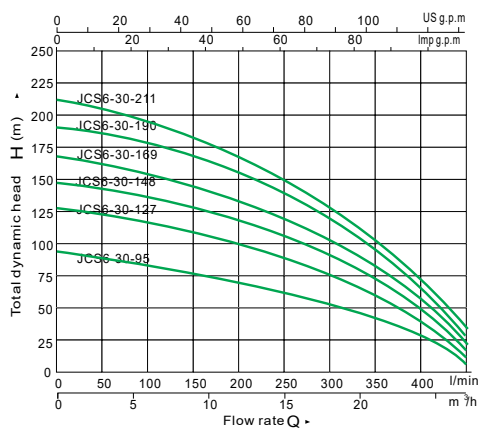

PUMP PERFORMANCE

TYPE	VOLTAGE (v)	POWER (w)	MAX FLOW (m ³ /h)	MAX HEAD (m)	OUTLET (inch)	DIAMETER (mm)
JCS6-30-95	540	5500	30	95	3	150
JCS6-30-127	540	7500	30	127	3	150
JCS6-30-148	540	9200	30	148	3	150
JCS6-30-169	540	9200	30	169	3	150
JCS6-30-190	540	11000	30	190	3	150
JCS6-30-211	540	11000	30	211	3	150
JCS6-50-55	540	5500	50	55	4	150
JCS6-50-66	540	5500	50	66	4	150
JCS6-50-77	540	7500	50	77	4	150
JCS6-50-88	540	7500	50	88	4	150
JCS6-50-110	540	9200	50	110	4	150
JCS6-50-132	540	11000	50	132	4	150
JCS6-70-40	540	5500	70	40	4	150
JCS6-70-54	540	7500	70	54	4	150
JCS6-70-67	540	7500	70	67	4	150
JCS6-70-81	540	9200	70	81	4	150
JCS6-70-95	540	11000	70	95	4	150
JCS6-90-42	540	5500	90	42	4	150
JCS6-90-56	540	7500	90	56	4	150
JCS6-90-71	540	9200	90	71	4	150
JCS6-90-85	540	11000	90	85	4	150

EDGE RURAL SUPPLIES



INFO@EDGERURALSUPPLIES.COM.AU · PH: 0408 738 586
EDGERURALSUPPLIES.COM.AU

PANDURRA STATION
PRIVATE BAG 15 · PORT AUGUSTA SA 5701